

Quick Guide

1. WebApp


Start by accessing our WebApp at birdalert.dk. Here you can monitor your BirdAlert®'s, and change their settings. For more information about how to get started with the WebApp, go to wilddetect.com/en/app.

2. Connecting the selected power source

Plug in your power supply, either a 230 V adapter or solar panel, in the black socket on the back of the BirdAlert®. 

3. Fitting and connecting the BirdAlert® 2.0 microphone

Push the microphone's cable through the gap at the top part of the microphone holder, before sliding the microphone into it. Ensure the cable sticks out at the bottom of the microphone holder. The microphone can then be connected to either of the two red sockets, input A1 and A2. 

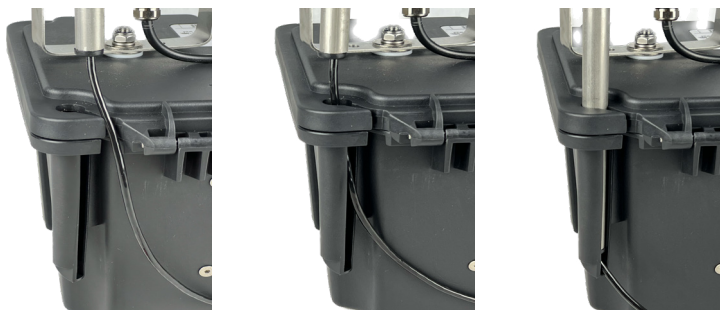

4. Connecting scare tools to the BirdAlert® 2.0

Only connect scare tools approved by Wilddetect® to the BirdAlert®. All scare tools can be connected to both the blue and green sockets, inputs 1-8. **Note:** speakers can only be connected to the green sockets, inputs 1-4. Read more about our scare tools on wilddetect.com.

5. Turn the BirdAlert® 2.0 on

Push the on/off button  to turn on the BirdAlert®. The button's LED will flash red whilst starting up, which takes approximately 2 minutes. Once the red LED is steady, the system is ready.

6. Turn the BirdAlert® 2.0 off

Push the on/off button  to turn off the BirdAlert®.